



Product Feature

1. Shell Compressive Standard Depth 300m
2. High Resolution 2 Megapixel
3. Minimum Illumination 0.00001Lux@F1.2
4. IP camera, ONVIF Compliant
5. Power And Data Transfer By 2 Wires Up To 600m



Main Specifications

Model no.	GLF-UDC-LI200
Image sensor	SONY 1/1.8" CCD
Resolution	2 Megapixel
Sensitivity	0.00001Lux@F1.4 (Color mode); 0.00001Lux@F1.2 (Monochrome)
SIGNAL-NOISE RATIO	≥50dB (AGC OFF)

Add: Rm311, No.A building of SOHO, Zhangba 1st road, High-Tech Zone, Xian City, Shaanxi, China.

Email: info@granfoo-cn.com

Tel: 0086-29-68780868

Video Ccompression	H.264 Main Profile / M-JPEG
Voltage	48VDC
Network protocol	TCP/IP, HTTP NTP, IGMP, DHCP, UDPSMTP, RTP, RTSP, ARP, DDNS, DNS, HTTPS, P2P
View angel	90 degree
Lens	3.6mm (Optional 3.2mm/ 6mm/ 8mm)
Connector	MCBH2MSS
Depth rating	300m (Optional MAX 6000m)
Storage temperature	-30-60°C
Operating temperature	-20-50°C
Operating humidity	Relative Humidity Below 90%
Standard housing	SS316 (Optional: Ti6AL4V or AL6061-T6)
Window	Acrylic 300m (Optional Sapphire 6000m)
Dimensions	65mm(D)x170mm(L) Excluding Connector
Weight in the air	1.5KG

PLC Network Receiver



Add: Rm311, No.A building of SOHO, Zhangba 1st road, High-Tech Zone, Xian City, Shaanxi, China.


Email: info@granfoo-cn.com

Tel: 0086-29-68780868

GRANFOO Shaanxi Granfoo International Trading Co., Ltd

Power input	AC85V-245V 50/60HZ
Power output	DC48V
Max current	1.2A
Max capacity	220W
Speed	200Mbps
Max distance	600M
Network port	1*RJ45
Standard	IEEE802.11a IEEE802.3u IEEE802.3ab
Compatibility	200Mbps 300Mbps
Cable required	>2*0.5 ²
Shell material	ABS
Operating temperature	-20℃-40℃
Operating humidity	10%-90%RH
Operating requency	1.8-30MHZ
Dimension	125*60*40mm

Connecting

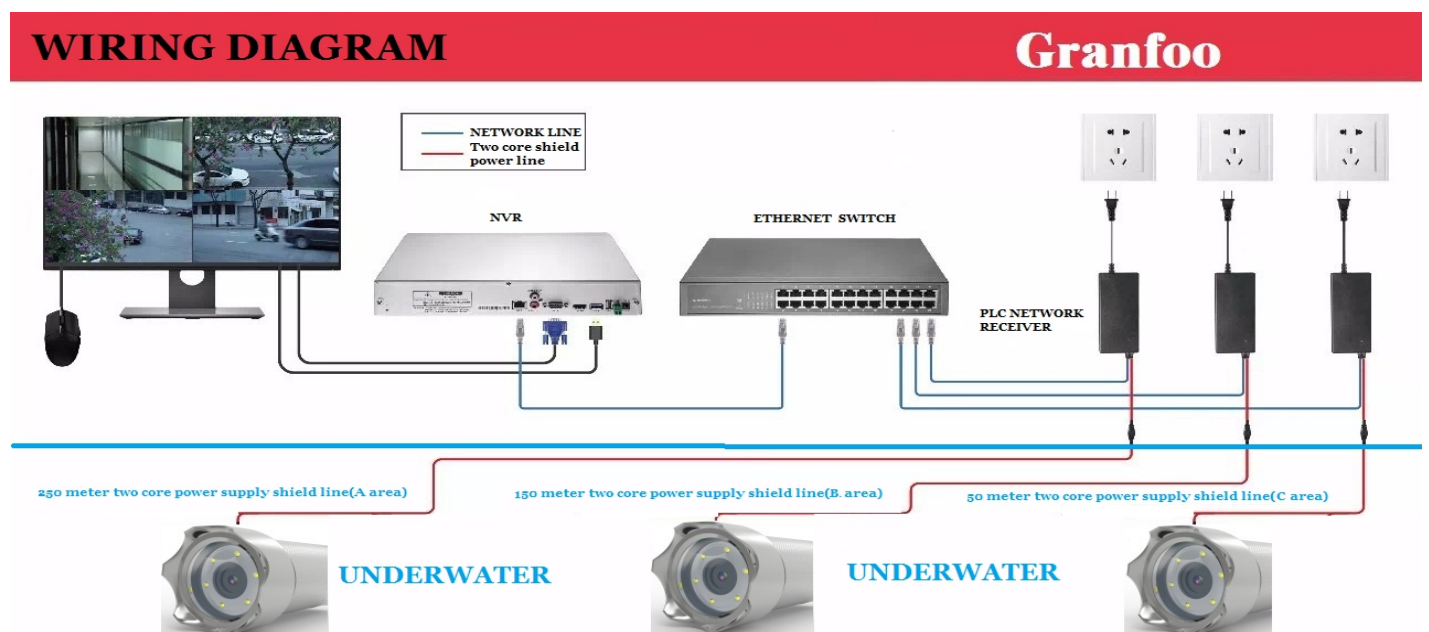

Add: Rm311, No.A building of SOHO, Zhangba 1st road, High-Tech Zone, Xian City, Shaanxi, China.

Email: info@granfoo-cn.com

Tel: 0086-29-68780868

Product Show



Similar Model

GLF-UDC-LI200L	Φ 65*170	IP Camera, with light, 90 FOV
GLF-UDC-LI200-DT	Φ 65*170	IP Camera, with depth and temperature sensor, without light, 90 FOV
GLF-UDC-LI200L-DT	Φ 65*170	IP Camera, with depth and temperature sensor, with light, 90 FOV
GLF-UDC-LI200-POM	Φ 65*170	GLF-UDC-LI200, but housing change to POM material

Packing List

1. Camera
2. 10m cable
3. PLC Receiver

Add: Rm311, No.A building of SOHO, Zhangba 1st road, High-Tech Zone, Xian City, Shaanxi, China.

Email: info@granfoo-cn.com

Tel: 0086-29-68780868